



NTC thermistors for temperature measurement

Small-Outline No-Lead NTC


Series/Type: T850/10k/F
Ordering code: B57850T0103F000
Date: 2022-07-12
Version: 1

Applications

Surface temperature measurement

Features

- Lead free
- Halogen free
- NTC is fully sealed with epoxy
- High humidity resistance
- High degree of electrical insulation between surface measurement and NTC
- Wider sensing area
- Phosphor bronze electrodes
- Automation friendly processing



Ratings and characteristics

Climatic category (IEC 60068-1) (test without voltage)	-	-	-40/155/56
Lower category temperature	-	°C	-40
Upper category temperature	-	°C	155
Rated resistance R_R // Tolerance	R_R	Ω // %	10000 // ± 1
Rated temperature	T_R	°C	25
B-value: $B_{(25/100)}$ // Tolerance	B	K // %	3988 // ± 1
R/T curve no. // R_{25}		n // Ω	8016 // 10000
Dissipation factor (in air)	δ_{th}	mW/K	4.2
Heat capacity	C_{th}	mJ/K	178
Thermal time constant – $t(0.63)^1$	τ_c	s	<2
Reponse time			
Voltage proof	V_{is}	V_{AC} // t	2500 // 60 s

¹⁾ NTC sensor, from ambient temperature, is pressed to metal surface with temperature of 85 °C.


Delivery mode

According to JEDEC standard tray 12.7 x 5.35 inches

294 components per tray

Other options upon request available (8" frame, blister, bulk)

Dimensional drawing

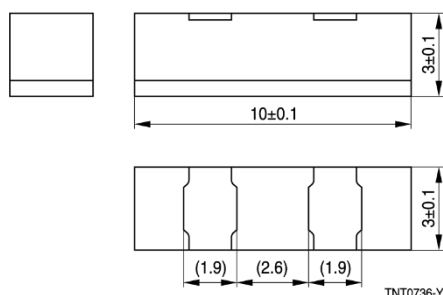

Dimensions in mm

Ordering code

[B57850T0103F000](#)

NTC resistance temperature curve
R/T curve 8016 / A01

B_(25/100) 3988 K ±1%

R at 25 °C 10000 Ω

R_R at 25 °C 10000 Ω ±1%

T °C	R _{Nom} Ω	R _{Min} Ω	R _{Max} Ω	ΔR ±%	ΔT ±°C
-40	336500	320419	352582	4.8	0.7
-35	242589	231867	253311	4.4	0.7
-30	177000	169786	184214	4.1	0.7
-25	130370	125487	135252	3.7	0.6
-20	97070	93743	100397	3.4	0.6
-15	72929	70652	75206	3.1	0.6
-10	55330	53765	56895	2.8	0.5
-5	42315	41237	43393	2.5	0.5
0	32650	31907	33393	2.3	0.4
5	25388	24877	25898	2.0	0.4
10	19900	19550	20250	1.8	0.4
15	15708	15470	15946	1.5	0.3
20	12490	12330	12650	1.3	0.3
25	10000	9900	10100	1.0	0.2
30	8057.0	7954.6	8159.4	1.3	0.3
35	6531.3	6434.4	6628.2	1.5	0.4
40	5327.0	5236.9	5417.1	1.7	0.4
45	4368.7	4286.1	4451.3	1.9	0.5
50	3603.0	3527.9	3678.1	2.1	0.5
55	2986.2	2918.3	3054.1	2.3	0.6
60	2488.0	2426.9	2549.1	2.5	0.7
65	2083.0	2028.2	2137.9	2.6	0.8
70	1752.0	1702.9	1801.1	2.8	0.8
75	1481.4	1437.4	1525.4	3.0	0.9
80	1258.0	1218.6	1297.4	3.1	1.0
85	1072.3	1037.1	1107.6	3.3	1.0
90	917.70	886.09	949.31	3.4	1.1
95	788.52	760.18	816.85	3.6	1.2
100	680.00	654.58	705.42	3.7	1.3
105	588.59	565.76	611.43	3.9	1.4
110	511.20	490.66	531.74	4.0	1.4
115	445.41	426.92	463.90	4.2	1.5
120	389.30	372.63	405.97	4.3	1.6
125	341.70	326.63	356.77	4.4	1.7
130	300.90	287.26	314.54	4.5	1.8
135	265.44	253.09	277.80	4.7	1.9
140	234.80	223.59	246.01	4.8	2.0
145	208.32	198.14	218.50	4.9	2.1
150	185.30	176.03	194.57	5.0	2.2
155	165.35	156.90	173.80	5.1	2.3

Reliability data

Test	Test conditions	$\Delta R_{25}/R_{25}$ (typical)	Remarks
Storage in dry heat	Storage at T = 155 °C, Duration: 1000 h	< 3%	No visible damage
Storage in coldness	Storage at T = -40 °C, Duration: 1000 h	< 3%	No visible damage
Storage in damp heat, steady state with test voltage	Temperature of air: 85 °C; Relative humidity of air: 85% Duration: 56 days Voltage across NTC: 0.3 V DC	< 2%	No visible damage
Rapid change of temperature in air	Lower test temperature: -40 °C Upper test temperature: 155 °C Dwell time: 10 min Time to change from lower to upper temperature: < 30 s Number of cycles: 1000	< 3%	No visible damage
Immersion test ²⁾	Medium: Deionized water Temperature: 80 °C Voltage across NTC: 0.3 V DC Duration: 1000 h	< 2%	
Rapid change of temperature in water ²⁾ (T-shock)	Lower test temperature: 5 °C Upper test temperature: 95 °C Dwell time: 10 min Time to change from lower to upper temperature: < 30 s NTC is connected to 5 V DC and 10 k Ω series resistor Number of cycles: 500	< 2%	
Voltage proof test	The sensors are placed on a metal plate surface at ambient temperature, max relative humidity 75% The applied voltage, between metal plate and NTC electrodes, is 2500 V AC/60 s/1 mA		No flash over
Insulation test	The sensors are placed on a metal plate surface at ambient temperature, max relative humidity 75% The applied voltage, between metal plate and NTC electrodes, is 500 V DC.		Above 100 M Ω

2) NTC resistance value was measured through an extension wire soldered on NTC electrodes. Solder joints were coated with a hydrophobic coating material during test.

Reliability data according to AEC-Q200, Rev. D

Test	Test conditions	$\Delta R_{25}/R_{25}$ (typical)	Remarks
High temperature exposure (storage)	Storage at T = 125 °C t = 1000 h	< 2%	No visible damage
Biased humidity	T = 85 °C Relative humidity of air: 85% t = 1000 h Test voltage max 0.3 V _{DC} on NTC ¹⁾	< 2%	No visible damage
Operational life	T = 125 °C t = 1000 h Test voltage max 0.3 V _{DC} on NTC ¹⁾	< 2%	No visible damage
Temperature cycling	Lower test temperature: -55 °C Upper test temperature: 125 °C Dwell time: max. 30 min. at each temperature Transition time in air: max. 1 min Number of cycles: 1000	< 2%	No visible damage
Terminal strength (lead)	Test leaded device integrity Condition A: 2.27 N ²⁾	< 1%	No visible damage
Mechanical shock	Acceleration: 40 g ²⁾ Pulse duration: 6 ms Number of bumps: 3, each direction	< 1%	No visible damage
Vibration	Acceleration: 5 g t = 20 min. 12 cycles in each of 3 directions Frequency range: 10 ... 2000 Hz	< 1%	No visible damage

1) Self Heating of the NTC thermistor must not exceed 0.2 K, steady state. Test conditions deviating from AEC-Q200, Rev. D.

2) Deviating from AEC-Q200, Rev. D.

Cautions and warnings

Storage

- Store thermistors only in original packaging. Do not open the package prior to storage.
- Storage conditions in original packaging: storage temperature $-25\text{ }^{\circ}\text{C}$ to $+45\text{ }^{\circ}\text{C}$, relative humidity $\leq 75\%$ annual mean, $<95\%$ maximum 30 days per annum, dew precipitation is inadmissible.
- Do not store thermistors where they are exposed to heat or direct sunlight. Otherwise, the packing material may be deformed or components may stick together, causing problems during mounting.
- Avoid contamination of thermistor surface during storage, handling and processing.
- Avoid storage of thermistors in harmful environments like corrosive gases (SO_x, Cl etc).
- Use the components as soon as possible after opening the factory seals, i.e. the polyvinyl-sealed packages.
- Solder thermistors within the time specified after shipment.
For leaded components this is 24 months.

Handling

- NTC thermistors must not be dropped. Chip-offs or any other damage must not be caused during handling of NTCs.
- Do not touch components with bare hands. Gloves are recommended.
- Avoid contamination of thermistor surface during handling.
- Washing processes may damage the product due to the possible static or cyclic mechanical loads (e.g. ultrasonic cleaning). They may cause cracks to develop on the product and its parts, which might lead to reduced reliability or lifetime.

Bending/Twisting

- Bending on wire is permitted at a minimum distance of twice the wire's diameter plus 4 mm from the component head or housing. When bending ensure the wire is mechanically relieved at the component head or housing. The bending radius should be at least eight times the wire's diameter.
- Twisting is prohibited as it may cause cracks and or reduce bonding between insulation and coating/potting material.

Soldering

- Use resin-type flux or non-activated flux.
- Insufficient preheating may cause ceramic cracks.
- Rapid cooling by dipping in solvent is not recommended.
- Complete removal of flux is recommended.

Mounting

- Ensure that no thermo-mechanical stress occurs due to production processes (curing or overmolding processes) when thermistors are sealed, potted or overmolded or during their subsequent operation. The maximum temperature of the thermistor must not be exceeded. Ensure that the materials used (sealing/potting compound and plastic material) are chemically neutral.
- Electrodes/contacts must not be scratched or damaged before/during/after the mounting process.
- Contacts and housing used for assembly with the thermistor must be clean before mounting.
- Ensure that adjacent materials are designed for operation at temperatures comparable to the surface temperature of the thermistor. Be sure that surrounding parts and materials can withstand the temperature.
- Avoid contamination of the thermistor surface during processing.
- The connections of sensors (e.g. cable end, wire end, plug terminal) may only be exposed to an environment with normal atmospheric conditions.
- Tensile forces on cables or leads must be avoided during mounting and operation.
- Bending or twisting of cables or leads directly on the thermistor body is not permissible.
- Avoid using chemical substances as mounting aids. It must be ensured that no water or other liquids enter the NTC thermistors (e.g. through plug terminals). In particular, water based substances (e.g. soap suds) must not be used as mounting aids for sensors.

Operation

- Use thermistors only within the specified operating temperature range.
- Use thermistors only within the specified power range.
- Environmental conditions must not harm the thermistors. Only use the thermistors under normal atmospheric conditions or within the specified conditions.
- Ensure that no significant thermo-mechanical stress occurs during operation due to the mounting situation. Fixtures must not overstress the sensor by an excessive mechanical preload.
- Contact of NTC thermistors with any liquids and solvents shall be prevented. It must be ensured that no water enters the NTC thermistors (e.g. through plug terminals). For measurement purposes (checking the specified resistance vs. temperature), the component must not be immersed in water but in suitable liquids (e.g. Galden).
- Avoid dewing and condensation unless thermistor is specified for these conditions.
- Bending or twisting of cables and/or wires is not permissible during operation of the sensor in the application.
- Be sure to provide an appropriate fail-safe function to prevent secondary product damage caused by malfunction.

This listing does not claim to be complete, but merely reflects the experience of TDK Electronics.

Display of ordering codes for TDK Electronics products

The ordering code for one and the same product can be represented differently in data sheets, data books, other publications, on the company website, or in order-related documents such as shipping notes, order confirmations and product labels. **The varying representations of the ordering codes are due to different processes employed and do not affect the specifications of the respective products.** Detailed information can be found on the Internet under www.tdk-electronics.tdk.com/orderingcodes.

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule we are either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether a product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.tdk-electronics.tdk.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.

We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

6. Unless otherwise agreed in individual contracts, **all orders are subject to our General Terms and Conditions of Supply**.
7. **Our manufacturing sites serving the automotive business apply the IATF 16949 standard**. The IATF certifications confirm our compliance with requirements regarding the quality management system in the automotive industry. Referring to customer requirements and customer specific requirements ("CSR") TDK always has and will continue to have the policy of respecting individual agreements. Even if IATF 16949 may appear to support the acceptance of unilateral requirements, we hereby like to emphasize that **only requirements mutually agreed upon can and will be implemented in our Quality Management System**. For clarification purposes we like to point out that obligations from IATF 16949 shall only become legally binding if individually agreed upon.

Important notes

8. The trade names EPCOS, CarXield, CeraCharge, CeraDiode, CeraLink, CeraPad, CeraPlas, CSMP, CTVS, DeltaCap, DigiSiMic, ExoCore, FilterCap, FormFit, LeaXield, MiniBlue, MiniCell, MKD, MKK, ModCap, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, PowerHap, PQSine, PQvar, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, ThermoFuse, WindCap, XieldCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.tdk-electronics.tdk.com/trademarks.

Release 2020-06