

# Surge arrester

2-electrode arrester

Version:

 Series/Type:
 S30-A300XS

 Ordering code:
 B88069X6891T253

 Date:
 2020-10-14

09

 $\odot$  TDK Electronics AG 2020. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without TDK Electronics' prior express consent is prohibited.



S30-A300XS

B88069X6891T253

#### Surge arrester

#### 2-electrode arrester

# **Product description**

The S30 series has been especially designed to meet data transmission protection requirements. The optimized design features a high level of protection against fast rising transients usually caused by lightning disturbances. For use in high frequency data lines, the series offers ultra low capacitances and shows only marginally signal losses up to high frequencies. The devices are extremely reliable and are able to withstand high surge currents without destruction.

#### Features

- Very small size (EIA 1812)
- Short response time
- High current capability
- Stable performance over service life
- Ultra low capacitance and insertion loss
- High insulation resistance
- Excellent SMD handling
- RoHS-compatible

Applications

Telecommunication:

- Ethernet, PoE, xDSL
- Cable modem, splitters, line cards
- Wireless antenna protection

# Others:

- CCTV
- Switching power supply

#### **Product characteristics**

Physical dimensions (length × width × height)	0.18 × 0.12 × 0.10 in 4.5 × 3.2 × 2.7 mm			
Weight	~ 0.2	g		
Operating temperature	-40 +125	°C		
Recommended storage <sup>1)</sup> - temperature - humidity - period	+5 … +35 45 … 80 ≤ 2	°C % years		
Climatic category (IEC 60068-1)	40/125/21	40/125/21		
Moisture sensitivity level <sup>2)</sup>	1	1		
Marking, black positive		IY     I - Nominal voltage (I ≙ 300 V)     Y - Year of production (last digit)		
Certifications	UL 497B (E163070)	UL 497B (E163070)		

Notes:

<sup>1)</sup> Specified in terms of corrosion against Sn-plating

<sup>2)</sup> Tests according to JEDEC J-STD-020



Surge arrester

#### 2-electrode arrester

B88069X6891T253

S30-A300XS

#### Electrical specifications and stress test methods

Nominal DC spark-over voltage <sup>3) 4)</sup> Tolerance Min. Max.		300 ±30 210 390	V	
			%	
			V	
			V	
Impulse spark-over volta	ge			
at 100 V/µs - for 99% of measured		sured values	< 580	V
-	<ul> <li>typical values of</li> </ul>	<ul> <li>typical values of distribution</li> </ul>		V
at 1 kV/µs - for 99% of measured values - typical values of distribution		sured values	< 650	V
		distribution	< 550	V
Service life 5)				
300 operations		8/20 µs	100	A
10 operations	[5× (+) & 5× (–)]	8/20 µs	1	kA
2 operations	[1× (+) & 1× (–)]	8/20 µs <sup>6)</sup>	2	kA
100 operations	[50× (+) & 50× (–)]	10/1000 µs	10	A
Insulation resistance at 100 $V_{DC}$		> 1	GΩ	
Capacitance at 1 MHz		< 0.4	pF	
Arc voltage at 1 A		~ 22	V	
Glow to arc transition current		< 0.2	А	
Glow voltage		~ 150	V	

 $^{\rm 3)}$  At delivery AQL 0.65 level II, DIN ISO 2859  $^{\rm 4)}$  In ionized mode

<sup>5)</sup> Tests according to ITU-T Rec. K. 12 and UL 497B

<sup>6)</sup> DC spark-over voltage values may exceed ±50% after stress, but tubes still operates w/o venting

Terms and current waveforms in accordance with ITU-T Rec. K. 12; IEC 61643-21 and IEC 61643-311.




# Surge arrester

#### 2-electrode arrester

B88069X6891T253 S30-A300XS


# Dimensions in mm and inch [...]

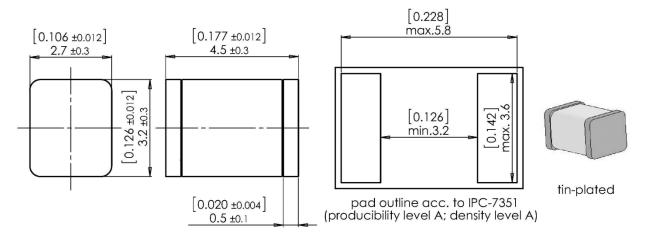

#### Ordering code and packing advice

B88069X6891T253 = 2500 pcs. on SMD-tape & reel [0.144] 3.65 SMD-tape according to IEC 60286-3 [0.016] 0.4 Æ Æ Ŧ Æ (+)(+)[0.472][0.193] 4.9 12 [0.315] [0.118] [0.059] 8 3 1.5



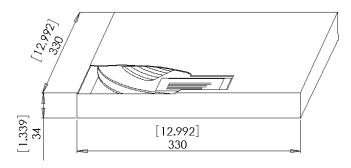

PPD AB PD / PPD AB PM

# ⊗TDK

#### Surge arrester


### 2-electrode arrester

B88069X6891T253

S30-A300XS

#### **Soldering parameter**

#### Reflow soldering

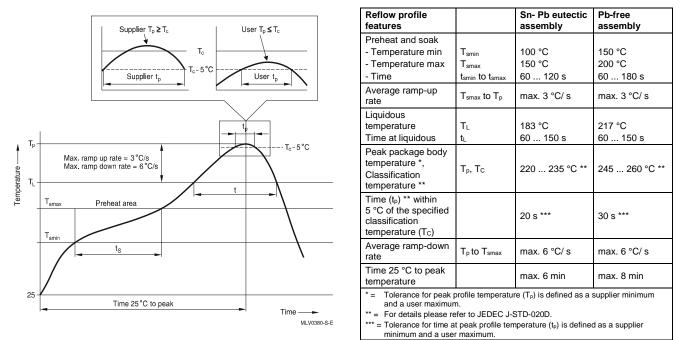

Surface mounted components (SMD) may exhibit a temporary increase in the DC spark-over voltage after the solder reflow process. The components will recover within 24 hours. There is no quality defect nor change in protection levels during the temporary change in DC spark-over voltage.

### **Cautions and warnings**

- Do not operate surge arresters in power supply networks, whose maximum operating voltage exceeds the minimum spark-over voltage of the surge arresters.
- Surge arresters may become hot in the event of longer periods of current stress (burn risk). In the event of overload the connectors may fail or the component may be destroyed.
- Surge arresters must be handled with care and must not be dropped.
- Do not continue to use damaged surge arresters.
- The shown SMD pad dimensions represent a safe way to mount the arrester and are a recommendation of the manufacturer. During the reflow process it must be assured that no solder material reduces the insulation distance between the pads below the arrester.
- SMD surge arresters should be soldered within 24 month after shipment.

### Display of ordering codes for TDK Electronics products

The ordering code for one and the same product can be represented differently in data sheets, data books, other publications, on the company website, or in order-related documents such as shipping notes, order confirmations and product labels. The varying representations of the ordering codes are due to different processes employed and do not affect the specifications of the respective products. Detailed information can be found on the Internet under www.tdk-electronics.tdk.com/orderingcodes.

PPD AB PD / PPD AB PM

The following applies to all products named in this publication:

- 1. Some parts of this publication contain statements about the suitability of our products for certain areas of application. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application. As a rule we are either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether a product with the properties described in the product specification is suitable for use in a particular customer application.
- 2. We also point out that in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
- 3. The warnings, cautions and product-specific notes must be observed.
- 4. In order to satisfy certain technical requirements, some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous). Useful information on this will be found in our Material Data Sheets on the Internet (www.tdk-electronics.tdk.com/material). Should you have any more detailed questions, please contact our sales offices.
- 5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.

We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

- 6. Unless otherwise agreed in individual contracts, all orders are subject to our General Terms and Conditions of Supply.
- 7. Our manufacturing sites serving the automotive business apply the IATF 16949 standard. The IATF certifications confirm our compliance with requirements regarding the quality management system in the automotive industry. Referring to customer requirements and customer specific requirements ("CSR") TDK always has and will continue to have the policy of respecting individual agreements. Even if IATF 16949 may appear to support the acceptance of unilateral requirements, we hereby like to emphasize that only requirements mutually agreed upon can and will be implemented in our Quality Management System. For clarification purposes we like to point out that obligations from IATF 16949 shall only become legally binding if individually agreed upon.



Important notes

8. The trade names EPCOS, CarXield, CeraCharge, CeraDiode, CeraLink, CeraPad, CeraPlas, CSMP, CTVS, DeltaCap, DigiSiMic, ExoCore, FilterCap, FormFit, LeaXield, MiniBlue, MiniCell, MKD, MKK, ModCap, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, PowerHap, PQSine, PQvar, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, ThermoFuse, WindCap, XieldCap are trademarks registered or pending in Europe and in information other countries. Further will be found on the Internet at www.tdk-electronics.tdk.com/trademarks.

Release 2020-06